


Tagging that Book

1 Remove any existing RFID tags or Plescon tags

2 Put a new RFID tag in the book. The tag should go on the inside of the back cover with the long edges of the tag parallel with the top and bottom of the book. The tag should be in the bottom quarter of the page (see below):

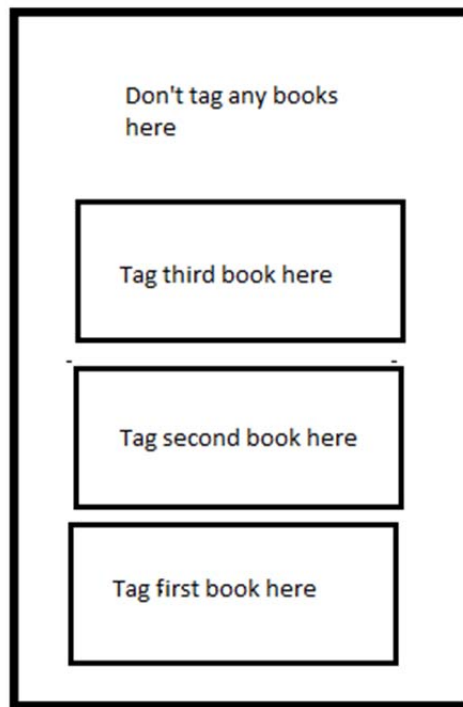

3 Close the book and use Tag Apply to allocate the tag to the book.

If you are tagging more than one book, place the tag on the second book higher than you did for the first tag, and tag the third book higher still, without tagging in the top quarter of any book. Tag the fourth book in the same place as the first, the fifth in the same place as the second and so on. This helps avoid tags interfering with each other.